

## G.652.D

### Single-mode fiber compliant with ITU-T G.652.D

#### Physical Characteristics:

Clad Diameter:	125.0 ± 0.7 μm
Clad Non-Circularity:	≤ 0.7 %
Core-Clad Conc. Error:	≤ 0.5 μm
Coating Diameter (uncolored):	237 – 247 μm
Coating-Clad Conc. Error:	≤ 12 μm
Tensile Proof Test:	100 kpsi (0.69 GPa)
Coating Strip Force Range:	1.0 N ≤ CSF ≤ 8.9 N
Standard Reel Lengths:	50.4 km

#### Environmental Characteristics (at 1310, 1550 and 1625 nm):

- Temperature Cycling (-60 °C to +85 °C) ≤ 0.05 dB/km
- High Temperature Aging (85 ± 2 °C) ≤ 0.05 dB/km
- Temperature & Humidity Cycling (at -10 °C to +85 °C, and 95 % RH) ≤ 0.05 dB/km
- Water Immersion (23 ± 2 °C) ≤ 0.05 dB/km
- Dynamic Fatigue Stress Corrosion Parameter  $n_d \geq 20$

#### Attenuation Characteristics:

	Maximum	Typical
1310 nm	≤ 0.34 dB/km	≤ 0.33 dB/km
1385 nm	≤ 0.31 dB/km	≤ 0.27 dB/km
1490 nm	≤ 0.24 dB/km	≤ 0.21 dB/km
1550 nm	≤ 0.21 dB/km	≤ 0.19 dB/km
1625 nm	≤ 0.23 dB/km	≤ 0.21 dB/km

#### Attenuation vs. Wavelength:

Range	Reference	Max Difference α
1285 – 1330 nm	1310 nm	≤ 0.03 dB/km
1525 – 1575 nm	1550 nm	≤ 0.02 dB/km

The attenuation in a given wavelength range does not exceed the attenuation of the reference wavelength by more than the value α.

Point Discontinuities 1310 nm, 1550 nm ≤ 0.05 dB


#### Macrobend Performance:

Bending-induced attenuation does not exceed the specified values under the following deployment conditions:

Deployment Condition	Wavelength	Induced Attenuation
1 turn on 16 mm radius mandrel	1550 nm	≤ 0.05 dB
	1310 nm	≤ 0.05 dB
100 turns on 25 mm radius mandrel	1550 nm	≤ 0.05 dB
	1550 nm	≤ 0.05 dB
100 turns on 30 mm radius mandrel	1550 nm	≤ 0.05 dB
	1625 nm	≤ 0.05 dB

#### Other Characteristics:

Zero Dispersion Wavelength $\lambda_0$ :	1302 – 1322 nm
Zero Dispersion Slope $S_0$ :	≤ 0.090 ps/nm <sup>2</sup> ·km
Fiber PMD Link Design Value:	≤ 0.06 ps/√km
Maximum Individual Fiber PMD:	≤ 0.1 ps/√km
Mode Field Diameter (1310 nm):	9.2 ± 0.4 μm
Mode Field Diameter (1550 nm):	10.4 ± 0.5 μm
Cable Cut-Off Wavelength $\lambda_{cc}$ :	≤ 1260 nm

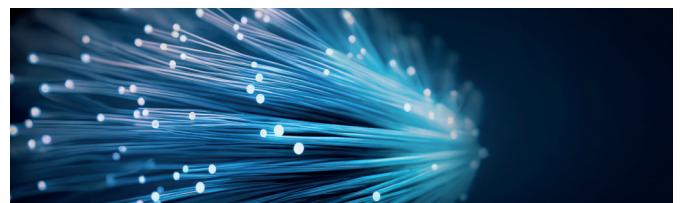

Denmark

Heraeus Comvance Denmark ApS

Priorparken 611

2605 Brøndby

Phone +49 6181 35 8307

comvance.eu@heraeus.com

www.heraeus-comvance.com